


Optimus

OR-K-OP1

Orbital Express Truss™ features over 40 professionally designed “off-the-shelf” kits for a variety of booth sizes and configurations. Each kit comes complete with all the parts, fixtures and fittings you need to create a successful exhibit, including (depending on the kit) low voltage spotlights and adjustable tabletops. A benefit to this versatile system is that it enables you to reconfigure kits in multiple ways and combinations using the same parts. Orbital Express Truss can also be easily customized!

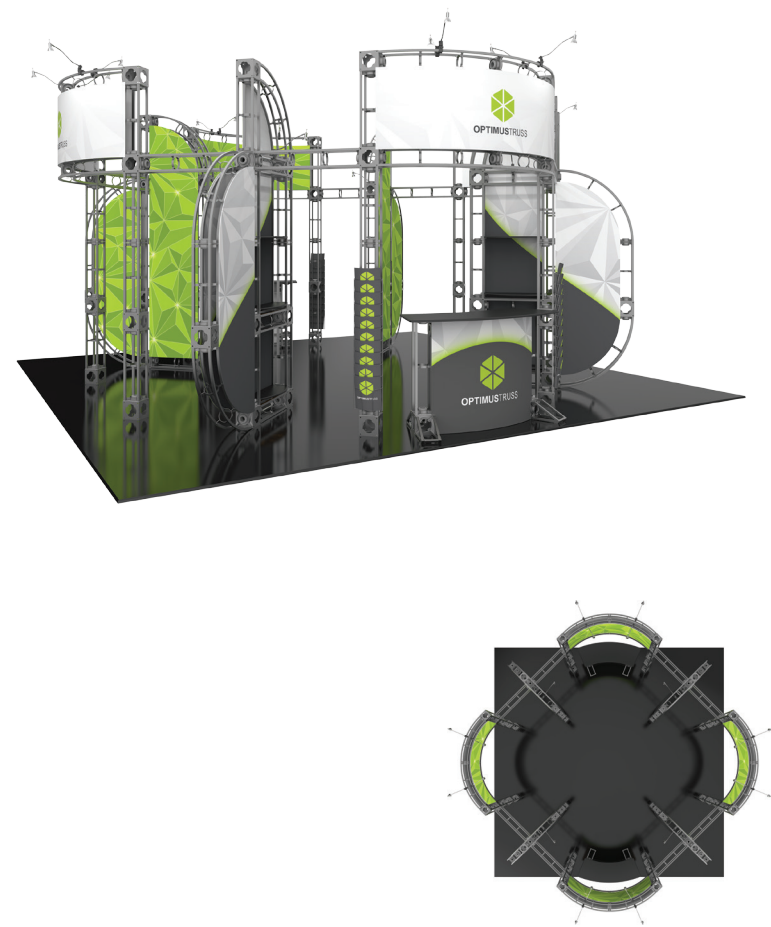

We are continually improving and modifying our product range and reserve the right to vary the specifications without prior notice. All dimensions and weights quoted are approximate and we accept no responsibility for variance. E&OE. See Graphic Templates for graphic bleed specifications.
































features and benefits:

- Kit includes:
 - 64 x 6-way junction boxes
 - 80 x 24" straight truss lengths
 - 4 x 30" straight truss lengths
 - 8 x 36" straight truss lengths
 - 20 x 45° curved truss lengths
 - 12 x 90° curved truss lengths
 - full set of quicklock connectors
 - 4 x junction bases
 - 2 x counters
 - 12 x 24" internal shelves
 - 4 x literature racks
 - 20 x 50 watt spotlights
 - 6 x OCF2 molded cases
 - 1 x OCT molded case
- 20' x 20' kit size
- Custom appearance
- Toolless assembly
- Simple twist and lock design
- 5 year warranty against manufacturer defects

dimensions:

Hardware:	Graphics:
Fits in a 20' x 20' space	Total Finished Size: Panels OP1-A, OP2-A, OP1-B, OP2-B, OP1-C, OP2-C, OP1-D & OP2-D: 25.75" w x 80" h
Shipping: 6 OCF2 cases (each case): 51" l x 51" w x 24" h 1295.4mm(l) x 1295.4mm(w) x 609.6mm(h) 1 OCT case: 50" l x 47" w x 43" h 1270mm(l) x 1193.8mm(w) x 1092.2mm(h) Approximate shipping weight: 1900 lbs / 862 kgs	Panels OP3-A, OP3-B, OP3-C & OP3-D: 25.75" w x 110.25" h Panels OP4-A, OP4-B, OP4-C & OP4-D: 84.25" w x 25.75" h Panels OP5-A, OP5-B, OP5-C & OP5-D: 74.75" w x 25.75" h Panels OP6-A & OP6-C: 43" w x 36.125" h *All dimensions available in millimeters Please be sure to include a 2" bleed around perimeter. Refer to related graphic template for specific information on sizes and bleeds. Visit exhibitors-handbook.com/graphic-templates
additional information:	
Graphic materials: Dye sublimated panels Counters (each): max weight = 35 lbs / 15.88 kgs Shelves (each): max weight = 25 lbs / 11.34 kgs	Lumina 1, 50 watt spotlight - Tabletop color options: (if applicable) <div><div></div>silver</div> <div><div></div>black</div> <div><div></div>mahogany</div> <div><div></div>natural</div>

OPTIMUS PIECE COUNT:

 OR-J-3 64	 OR-24-2 80	 OR-36-2 8	 OR-45-CV-3 20	 OR-B90 0
 OR-J-DBL 0	 OR-30-2 4	 OR-46-2 0	 OR-90-CV-2 12	 OR-B90A 4
 OR-B45 0	 OR-QL-T2J 188	 OR-UNC-QL 4	 OR-LCD1-B 0	 OR-LCD3-B 0
 OR-TOOL-B 3	 OR-QL-T2T 28	 OR-STG 4	 OR-LCD2-B 0	
 SPOTLIGHT 20	 OR-TBL2-L 0	 OR-IS-24 12	 OR-CIS-90 0	 OR-CIS-45 0
 OR-TBL 0	 OR-TBL2-R 0	 OR-IS-36 0	 OR-SE-IS-90 0	 OR-ATL-CNTR 0
		 OR-IS-46 0		
		 OR-IS-48 0		


OPTIMUS TABLETOP ACCESSORY PIECE COUNT:

 OR-PO1-15 0	 OR-PO2-15 0	 OR-TC01-15 0	 OR-PO3-15 0	 OR-TC02-15 0
 OR-PO1-15-P 0	 OR-PO2-15-P 0	 OR-TC01-15-P 0	 OR-PO3-15-P 0	 OR-TC02-15-P 0
 OR-PO4-15 0	 OR-TC03-15 0	 OR-PO5-15 0	 OR-TC04-18 2	
 OR-PO4-15-P 0	 OR-TC03-15-P 0	 OR-PO5-15-P 0	 OR-TC04-18-P 0	

OPTIMUS CASE COUNT:

 OCFM 0	 OCF 0	 OCF2 6	 OCT 1	 OCHM 0
 OCH 0	 OCH2 0			

OPTIMUS GRAPHIC SPECS:
AVAILABLE GRAPHICS – DYE SUBLIMATION

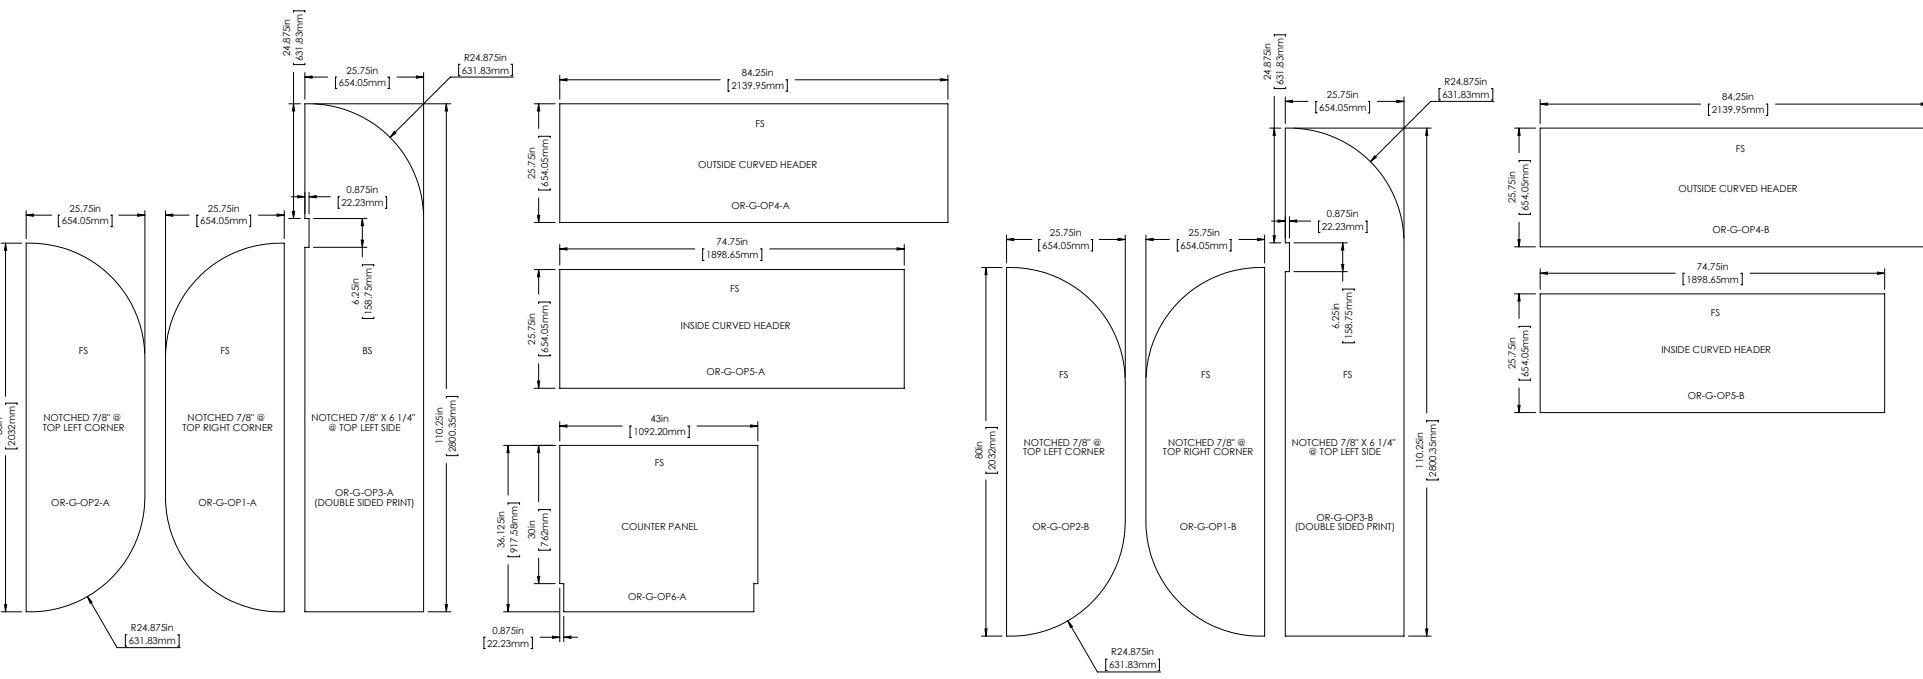

Acceptable File formats:

Illustrator CC or below
Photoshop CC or below
Art time will be charged if files need to be fixed or altered to meet guidelines. When sending files please be sure to include all support art (fonts, linked images, etc.)

Font Specifications:

Fonts must be converted to outlines.

Bleeds:

All orbital truss graphics require specific bleeds. The sizes listed above represent the finished graphic size. Please keep all logos, type and critical information at least 1" in from each edge of the finished graphic.

Dye Sublimation: 2" bleed around the perimeter.

UV: 1/2" bleed around the perimeter.

Color:

All files are printed as CMYK format. All critical Pantone colors need to be called out in the file or specified on the order as Coated or Uncoated swatches.

Resolution:

All raster files (either print files or linked files) must be at 100-120 pixels per inch at 100%

Finishing Details:

When graphics are notched, a 7/8" square is cut in the appropriate location.

FS: Graphics mounted to front of truss system


BS: Graphics mounted to back of truss system

Dye Sublimation graphics are attached to truss with velcro. UV panels are attached to truss with magnet.

To ensure quality, please note:

Each graphic has a specific code or number located on the graphic. The electronic print files provided must be named accordingly. Using this coding system will allow us to preflight and prepare your files for print more efficiently. **If you fail to provide your graphic files in this format, additional charges may be necessary to complete your printed materials.**

OPTIMUS GRAPHIC SPECS:
AVAILABLE GRAPHICS – DYE SUBLIMATION

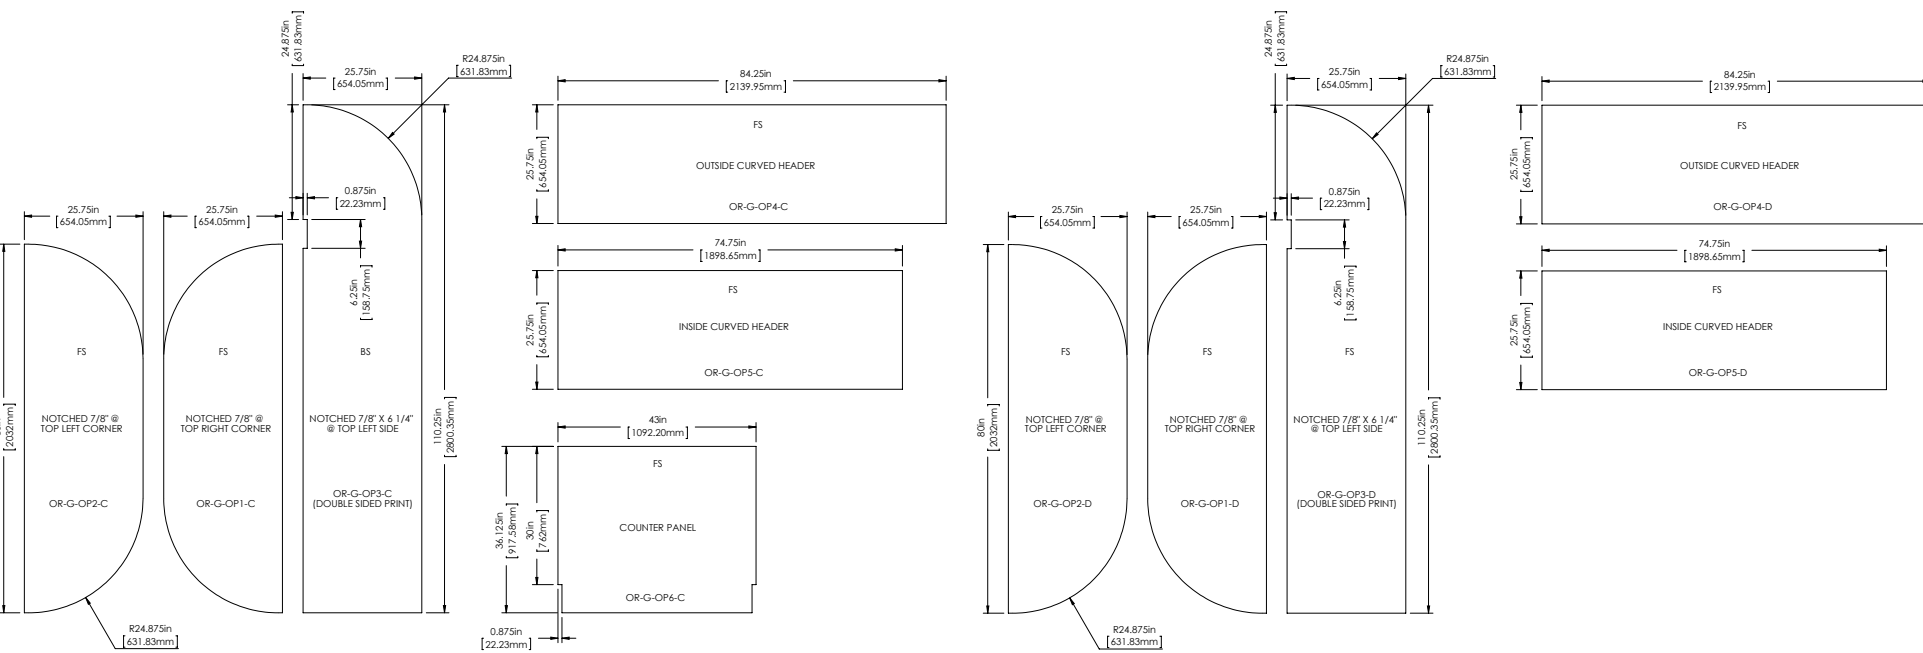

Acceptable File formats:
Illustrator CC or below
Photoshop CC or below
Art time will be charged if files need to be fixed or altered to meet guidelines. When sending files please be sure to include all support art (fonts, linked images, etc.)

Font Specifications:
Fonts must be converted to outlines.

Bleeds:
All orbital truss graphics require specific bleeds. The sizes listed above represent the finished graphic size. Please keep all logos, type and critical information at least 1" in from each edge of the finished graphic.

Dye Sublimation: 2" bleed around the perimeter.

UV: 1/2" bleed around the perimeter.

Color:
All files are printed as CMYK format. All critical Pantone colors need to be called out in the file or specified on the order as Coated or Uncoated swatches.

Resolution:
All raster files (either print files or linked files) must be at 100-120 pixels per inch at 100%

Finishing Details:
When graphics are notched, a 7/8" square is cut in the appropriate location.



FS: Graphics mounted to front of truss system
BS: Graphics mounted to back of truss system

Dye Sublimation graphics are attached to truss with velcro. UV panels are attached to truss with magnet.

To ensure quality, please note:

Each graphic has a specific code or number located on the graphic. The electronic print files provided must be named accordingly. Using this coding system will allow us to preflight and prepare your files for print more efficiently. **If you fail to provide your graphic files in this format, additional charges may be necessary to complete your printed materials.**

OPTIMUS GRAPHIC LAYOUT:

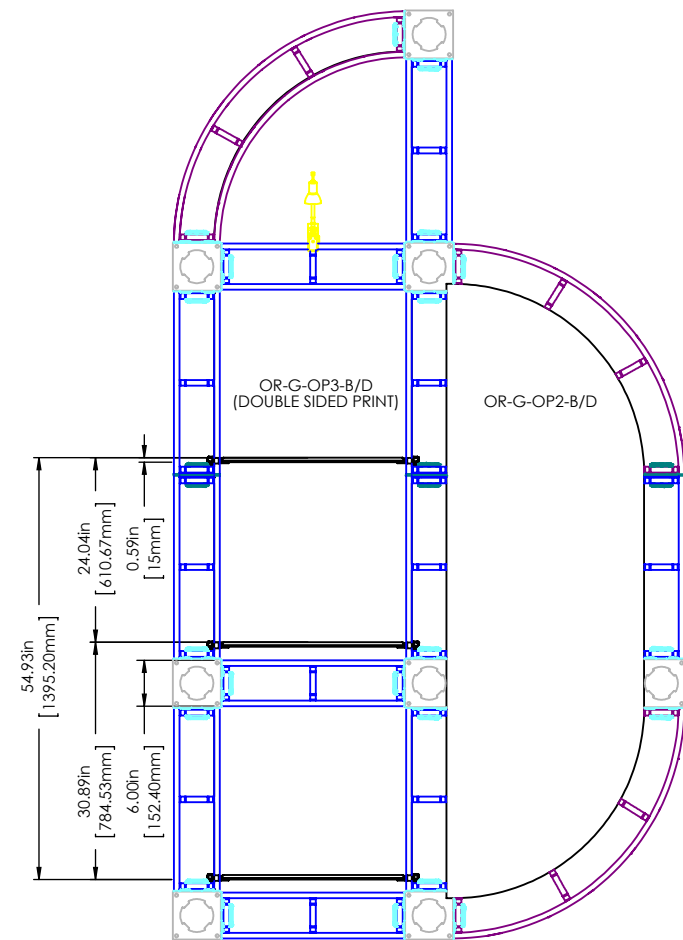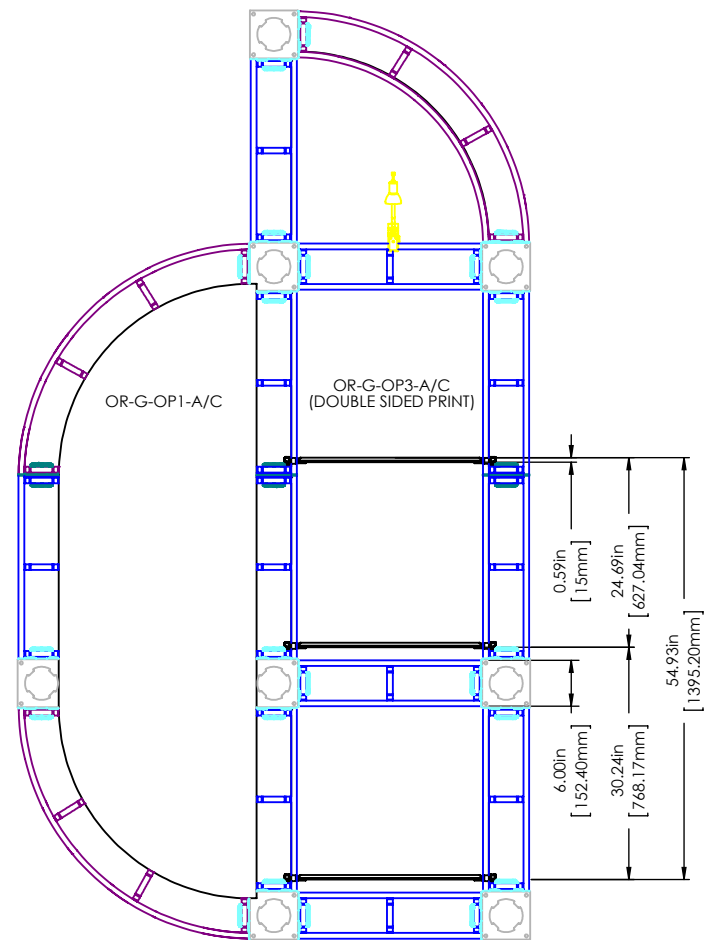


OPTIMUS FLOOR PLAN:


SCALE REF = 5ft



20'd x 20'w

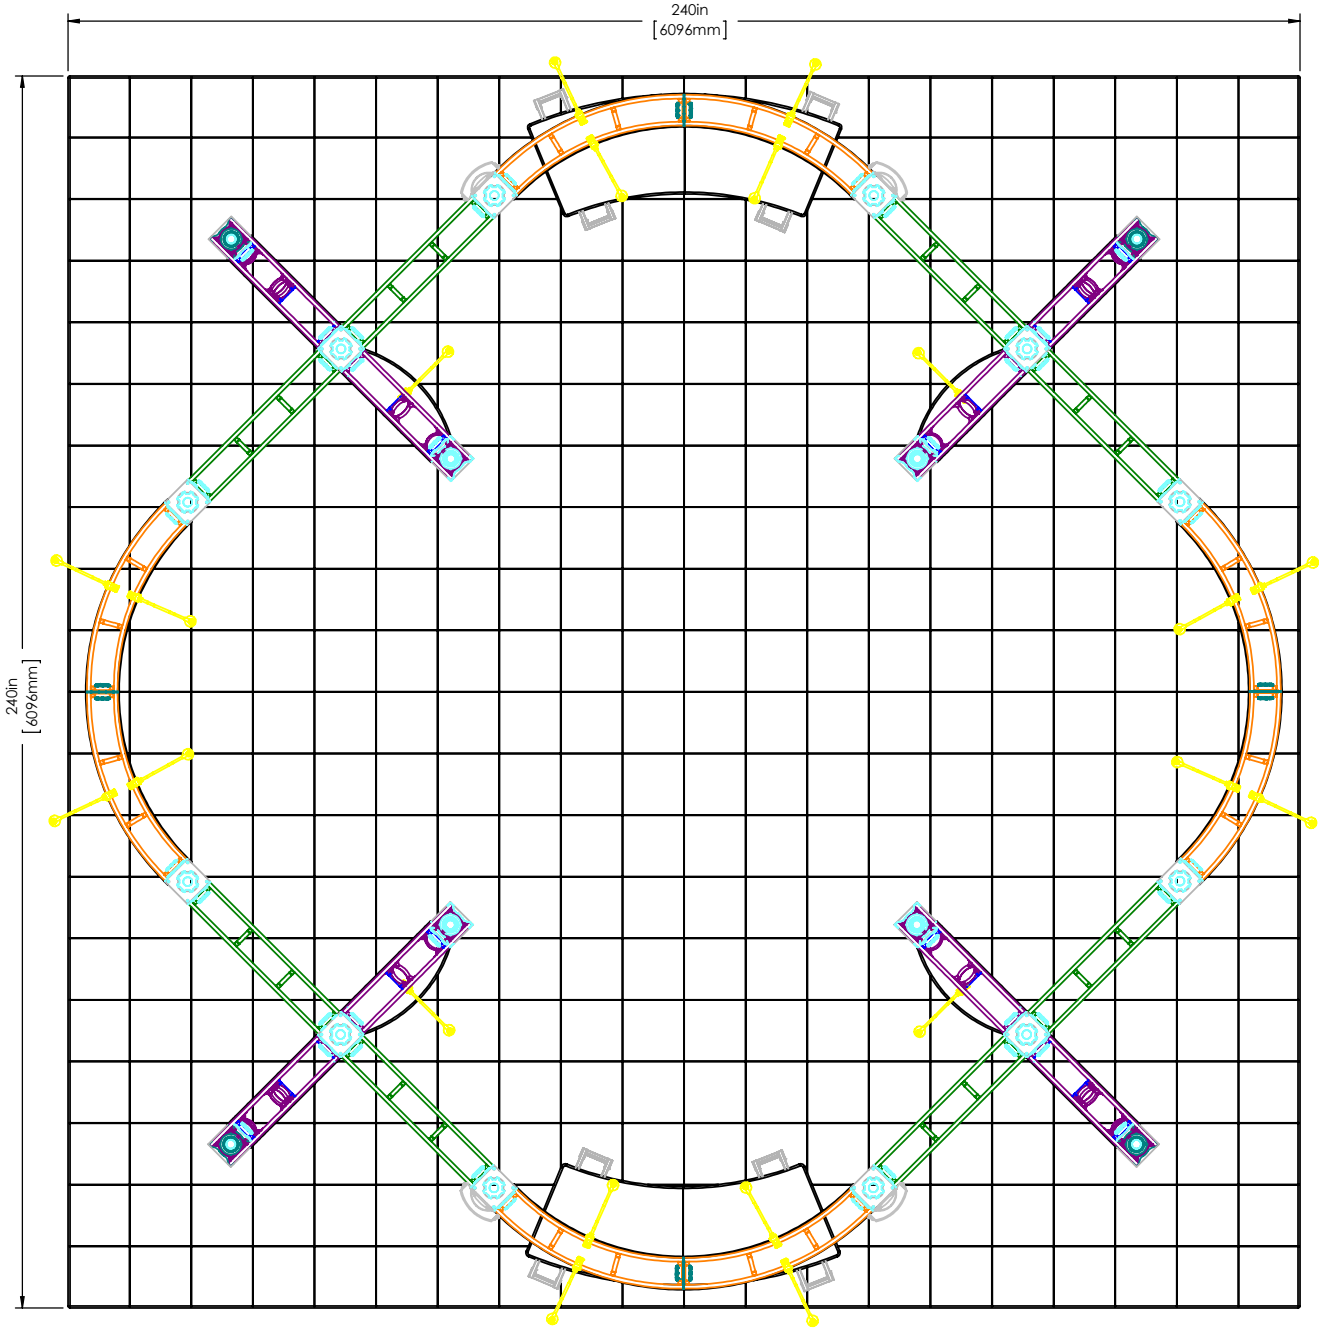

OPTIMUS FLOOR PLAN:

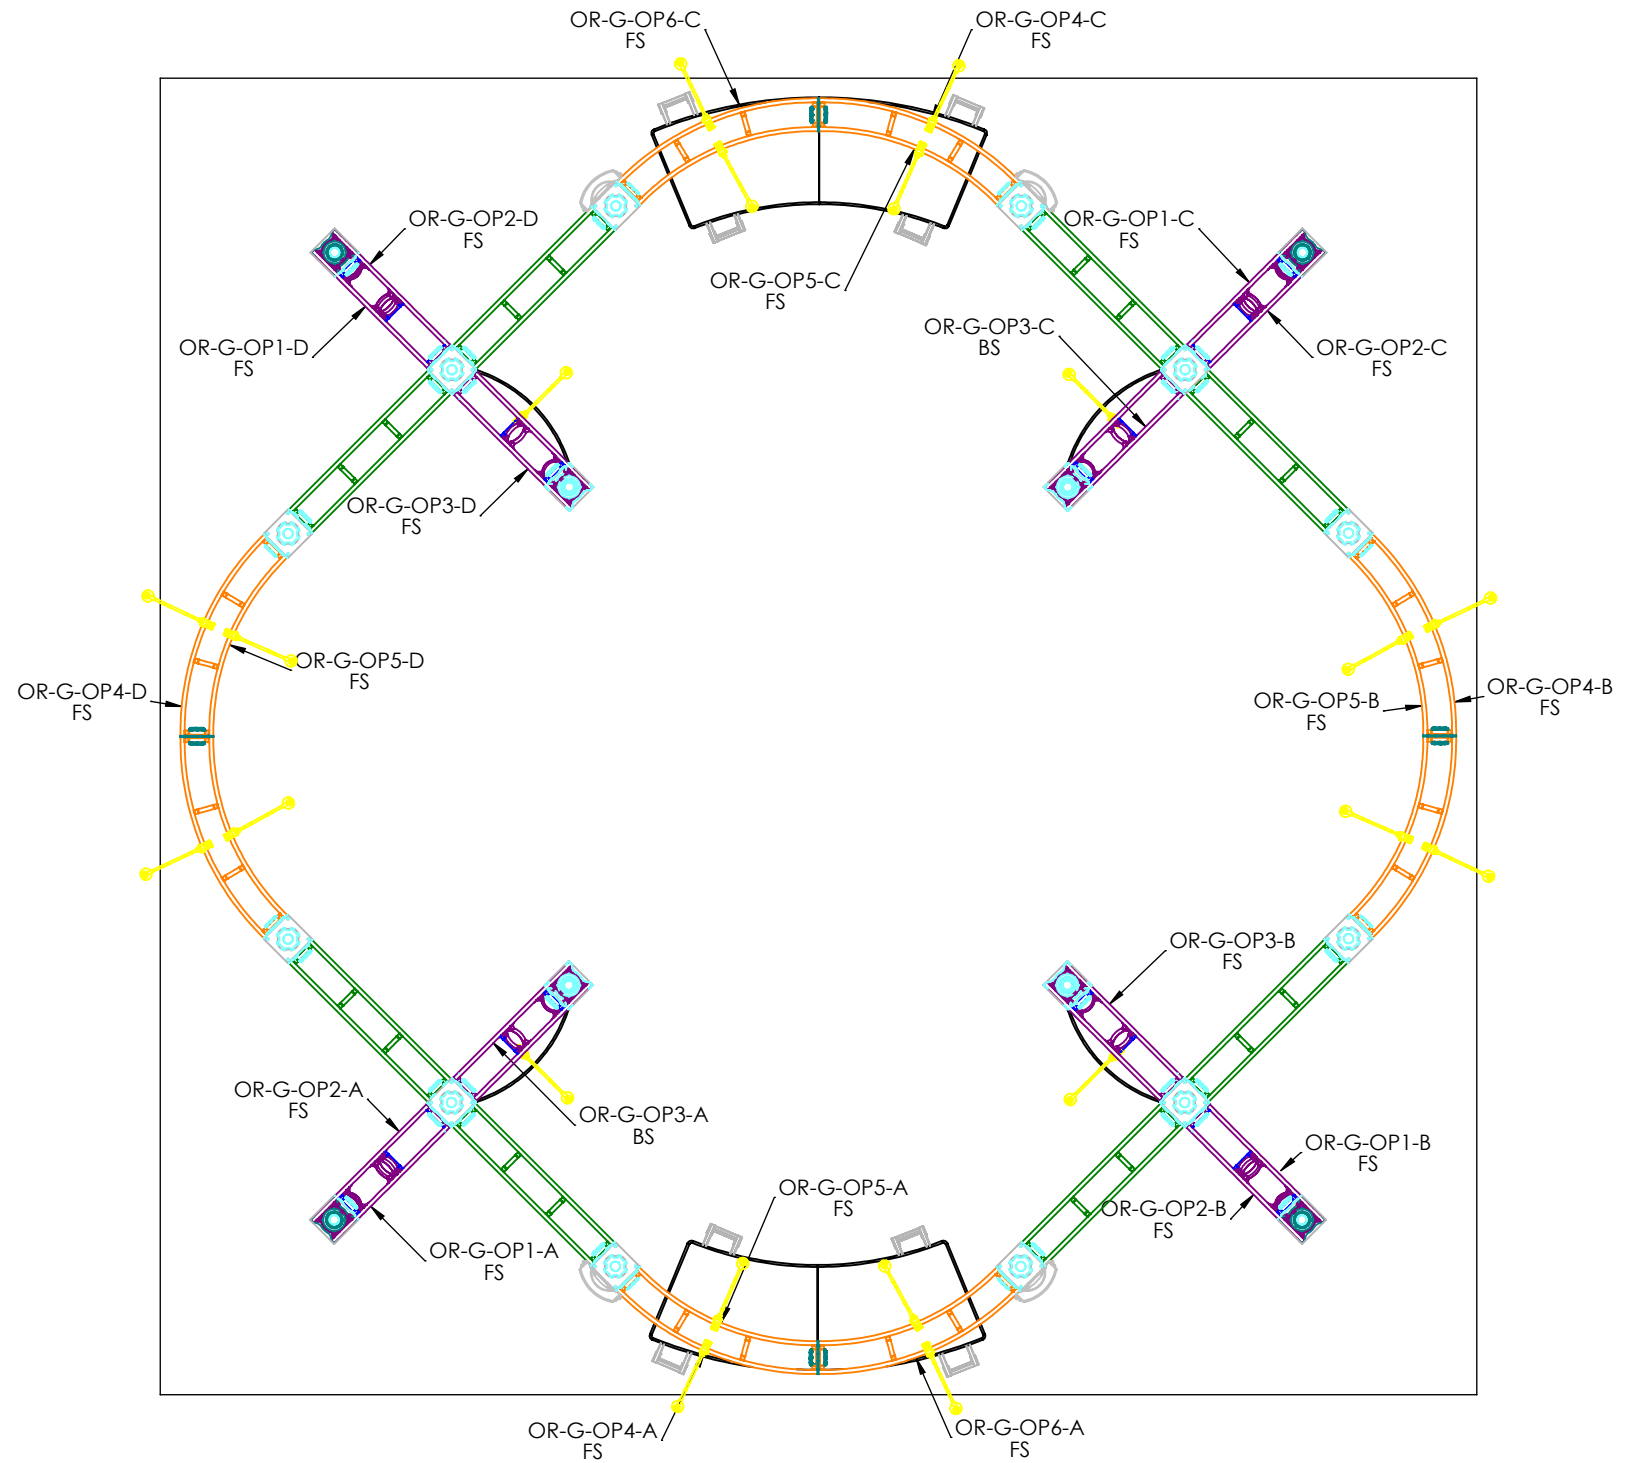

OPTIMUS COLOR CODED PARTS:

Parts exploded

