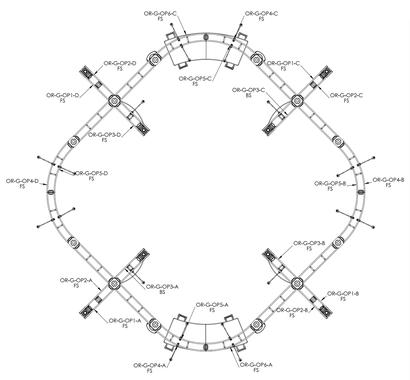

Optimus
20' x 20' Truss System
Dye Sub Printed

TEMPLATE SET-UP AT 1/4 SCALE

Panels OP1-A, OP2-A, OP1-B, OP2-B,
OP1-C, OP2-C, OP1-D, OP-2D
Total Graphic Area: 29.75"w x 84"h
Finished Size: 25.75"w x 80"h
Visual Size: 25.75"w x 80"h

Panels OP3-A and OP3-C
(Double Sided Prints)
Total Graphic Area: 29.75"w x 114.25"h
Finished Size: 25.75"w x 110.25"h
Visual Size: 23.75"w x 108.25"h

Panels OP3-B and OP3-D
(Double Sided Prints)
Total Graphic Area: 29.75"w x 114.25"h
Finished Size: 25.75"w x 110.25"h
Visual Size: 25.75"w x 110.25"h

Panels OP4-A, OP4-B, OP4-C, OP4-D:
Total Graphic Area: 88.25"w x 29.75"h
Finished Size: 84.25"w x 25.75"h
Visual Size: 84.25"w x 25.75"h

Panels OP5-A, OP5-B, OP5-C, OP5-D:
Total Graphic Area: 78.75"w x 29.75"h
Finished Size: 74.75"w x 25.75"h
Visual Size: 74.75"w x 25.75"h

Template requires 1/2" bleed around the perimeter (2" around the perimeter when scaled to 400% and printed)

FS = Graphic is front side mounted (3/4" w velcro is applied to the back of the panel)
BS = Graphic is back side mounted (3/4" w velcro is applied to the front of the panel)
Notching = 7/8" square that is cut into the appropriate location.
Hinging= 3/4" strip of material that is created by notching the graphic. Allows two graphics to share the same extrusion corner.

General Art Guidelines:
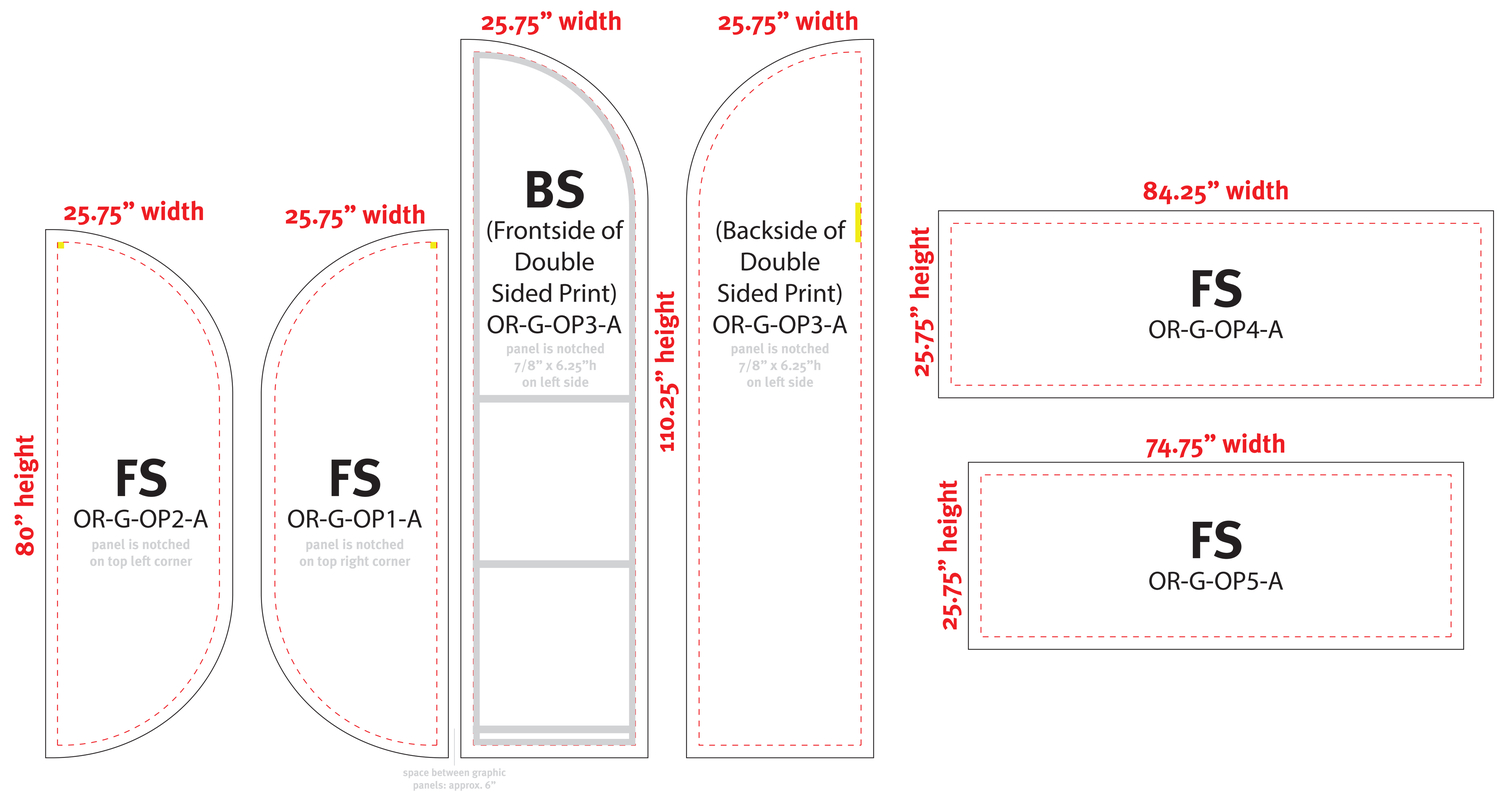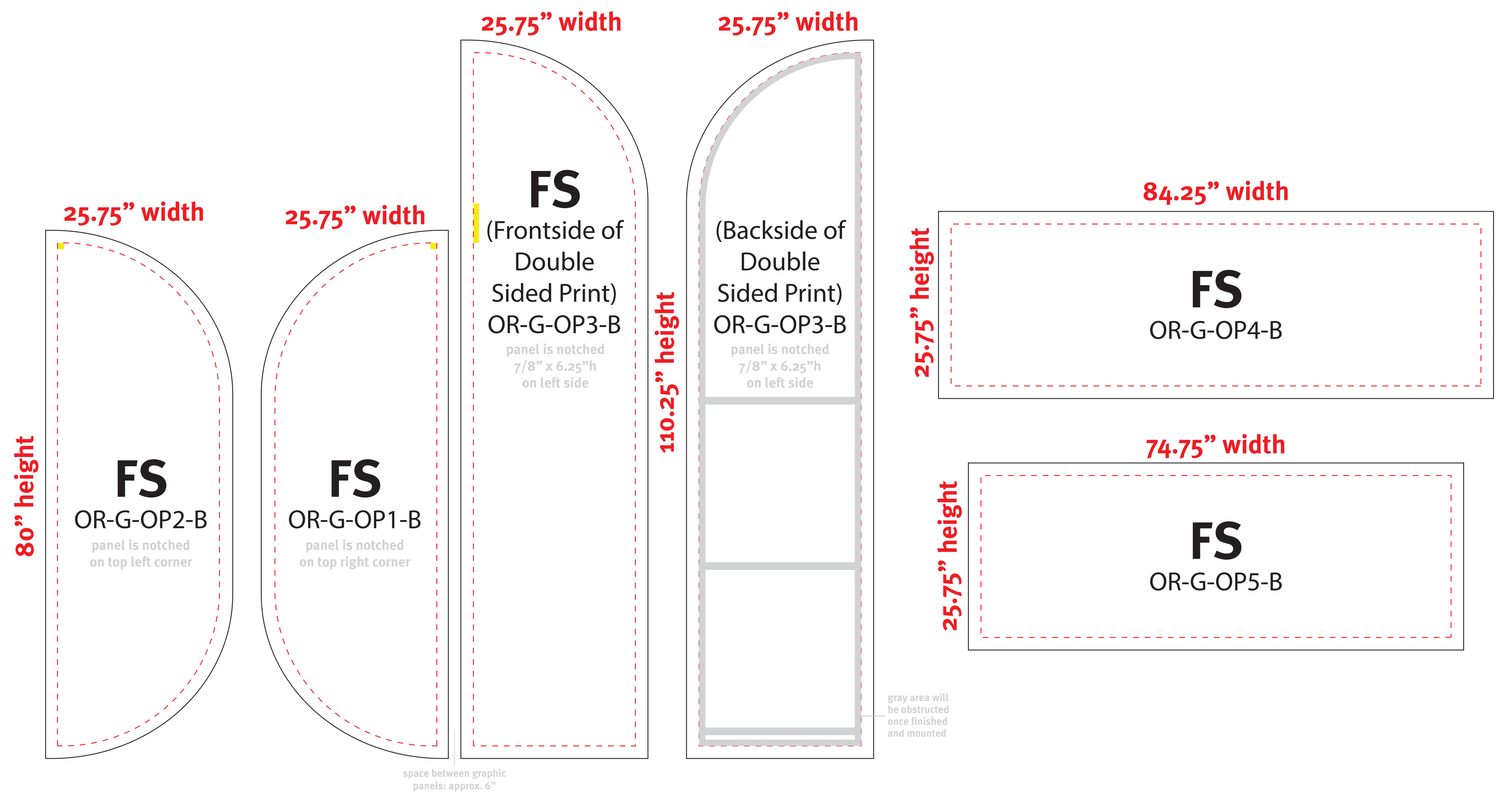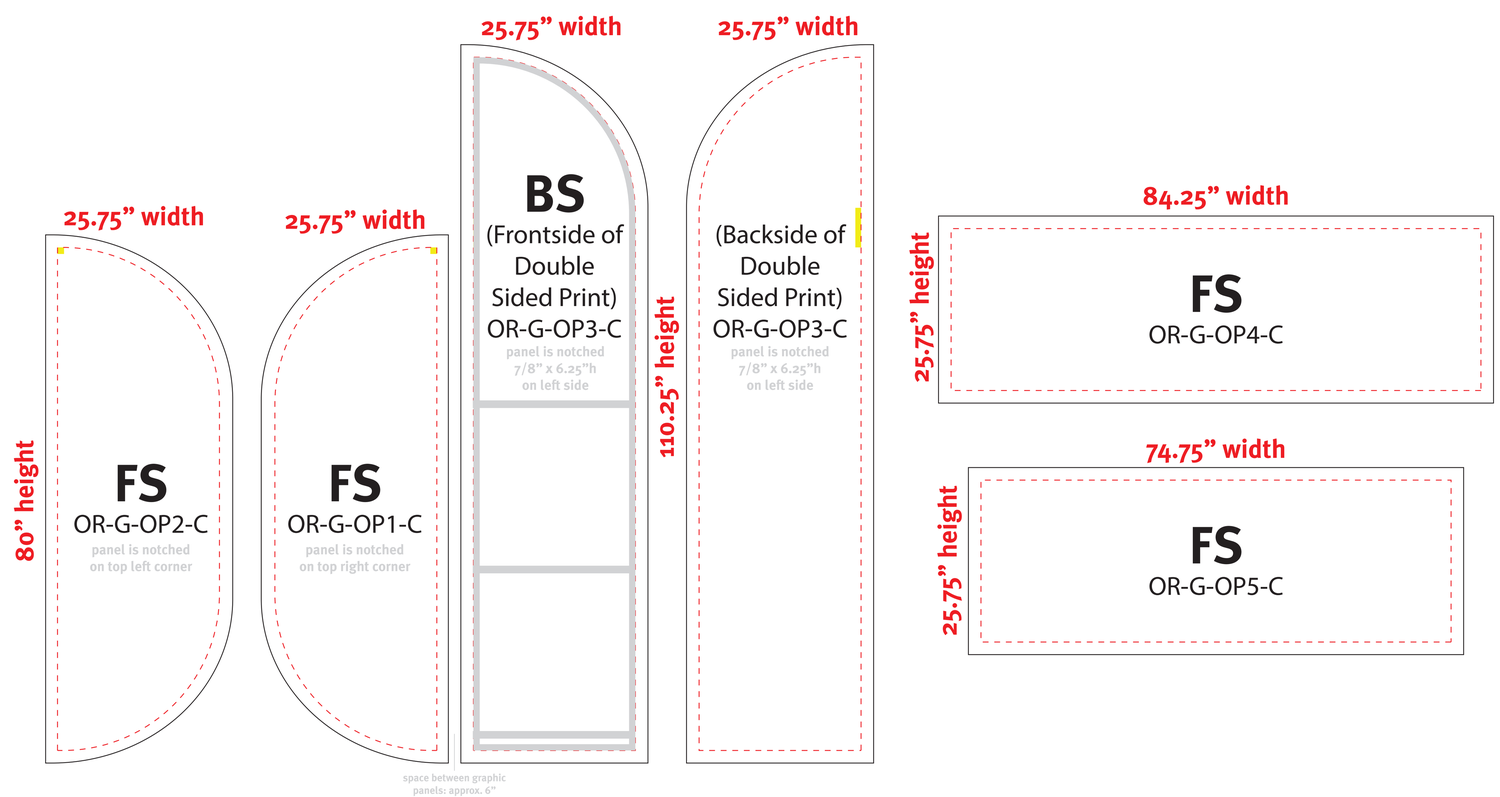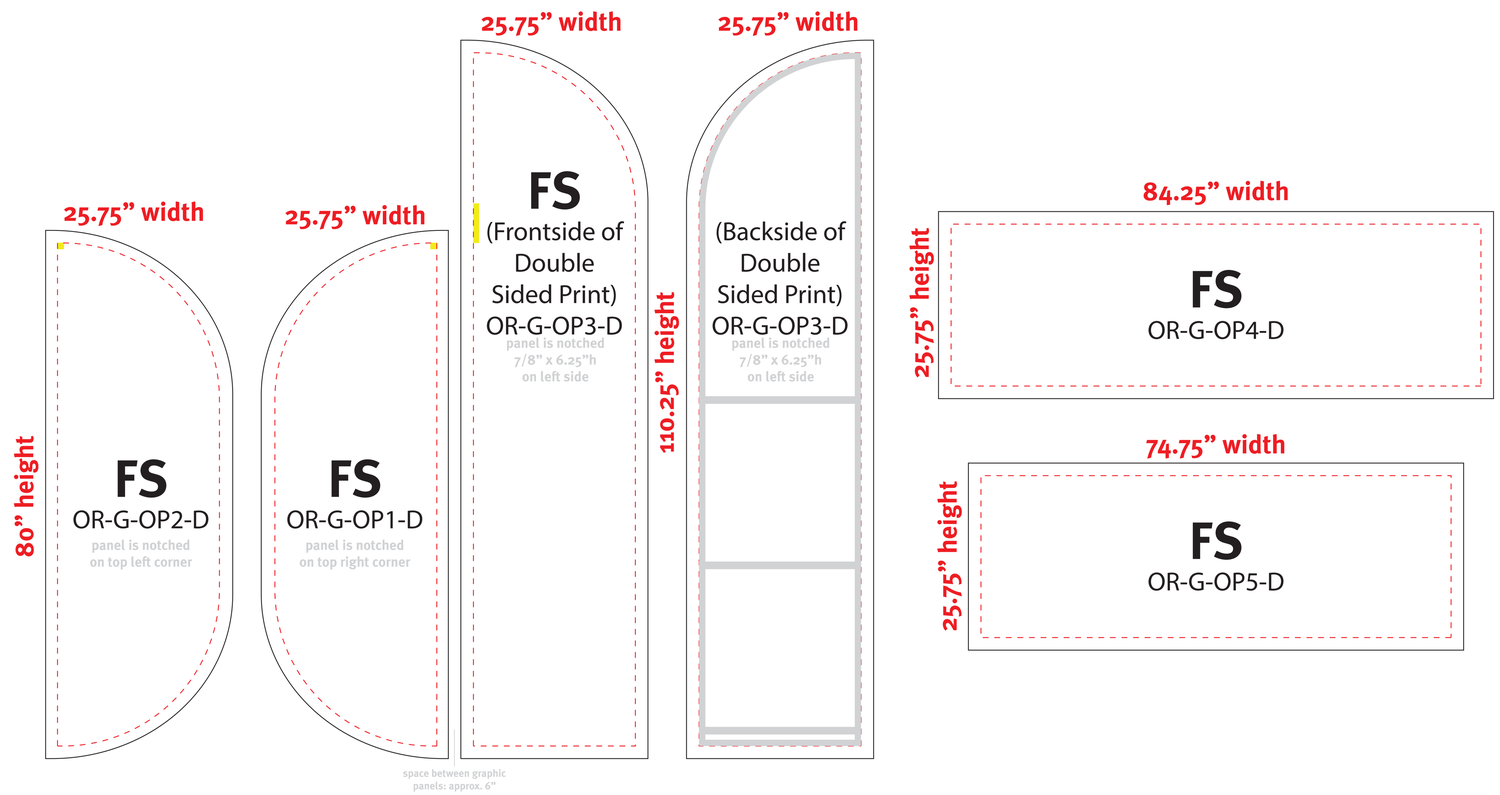
- CMYK Color
- Do not embed images, supply them
- Resolution must be 400-480 ppi @ fourth size, 100-120 ppi @ full size
- All fonts must be created to outlines