
Zenit

OR-K-ZE1

Orbital Express Truss™ features over 40 professionally designed "off-the-shelf" kits for a variety of booth sizes and configurations. Each kit comes complete with all the parts, fixtures and fittings you need to create a successful exhibit, including (depending on the kit) low voltage spotlights and adjustable tabletops. A benefit to this versatile system is that it enables you to reconfigure kits in multiple ways and combinations using the same parts. Orbital Express Truss can also be easily customized!



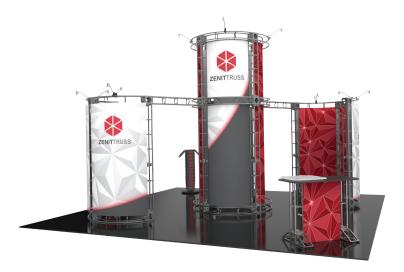

We are continually improving and modifying our product range and reserve the right to vary the specifications without prior notice. All dimensions and weights quoted are approximate and we accept no responsibility for variance. E&OE. See Graphic Templates for graphic bleed specifications.

features and benefits:

- Kit includes:
- 24 x 6-way junction boxes
- 2 x 24" straight truss lengths
- 2 x 30" straight truss lengths
- 10 x 36" straight truss lengths
- 16 x 46" straight truss lengths
- 20 x 90° curved truss lengths
- full set of quicklock connectors
- 2 x junction bases
- 1 x counter
- 1 x 24" internal shelf
- 12 x 50 watt spotlights

- 1 x OCF2 molded case
- 2 x OCT molded cases
- 20' x 20' kit size
- Custom appearance
- Tooless assembly
- Simple twist and lock design
- 5 year warranty against manufacturer defects

dimensions:

Graphics: Hardware: Fits in a 20' x 20' space Total Finished Size: Panels ZE1-A, ZE3-A, ZE5-A & ZE7-A: 39.5"w x 47.75"h Shipping: Panels ZE2-A, ZE4-A, ZE6-A & ZE8-A: 1 OCF2 case: 39.5"w x 83.75"h 51" | x 51" w x 24" h Panels ZE1-B, ZE1-C, ZE2-B & ZE2-C: 1295.4mm(l) x 1295.4mm(w) x 609.6mm(h) 49"w x 83.75"h Panels ZE3-B, ZE3-C, ZE4-B & ZE4-C: 2 OCT cases (each case): 39.5"w x 83.75"h 50"l x 47"w x 43"h 1270mm(l) x 1193.8mm(w) x 1092.2mm(h) Panel ZE1-D: 25.75"w x 36.125"h *All dimensions available in millimeters Approximate shipping weight: Please be sure to include a 2" bleed around 1000 lbs / 454 kas perimeter. Refer to related graphic template for specific information on sizes and bleeds. Dye-sublimated graphic require different bleed than UV. Visit exhibitors-handbook.com/graphic-templates

additional information:

Graphic materials: Dye sublimated or UV panels

Lumina 1, 50 watt spotlight

Counter: max weight = 35 lbs / 15.88 kgs

Shelves (each): max weight = 25 lbs / 11.34 kgs

*Orbital Truss kiosk not included.

Tabletop color options: (if applicable)











mahogany


natural


ZENIT PIECE COUNT:











































ZENIT TABLETOP ACCESSORY PIECE COUNT:
























ZENIT CASE COUNT:



















ZENIT GRAPHIC SPECS: AVAILABLE GRAPHICS - UV & DYE SUBLIMATION

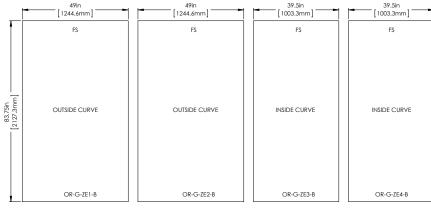

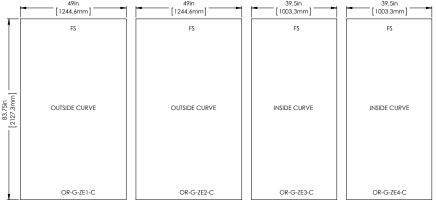

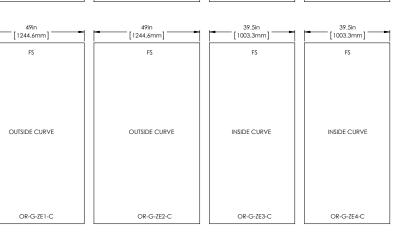

Acceptable File formats:

Illustrator CC or below Photoshop CC or below

Art time will be charged if files need to be fixed or altered to meet guildlines. When sending files please be sure to include all support art (fonts, linked images, etc.)

Font Specifications:

Fonts must be converted to outlines.

Bleeds:

All orbital truss graphics require specifics bleeds. The sizes listed above represent the finished graphic size. Please keep all logos, type and critical information at least 1" in from each edge of the finished graphic.

Dye Sublimation: 2" bleed around the perimeter.

UV: 1/2 " bleed around the perimeter.

Color:

36.125h 917.6mm] 30h 762mm]

[1003.3mm

OR-G-ZE1-A

BS

OR-G-ZE2-A

COUNTER PANEL

OR-G-ZE1-D

1003.3mm

OR-G-ZE3-A

BS

OR-G-7F4-A

All files are printed as CMYK format. All critical Pantone colors need to be called out in the file or specified on the order as Coated or Uncoated swatches

Resolution:

All raster files (either print files or linked files) must be at 100-120 pixels per inch at 100%

Finishing Details:

39.5in

[1003.3mm]

OR-G-ZE5-A

BS

OR-G-7F6-A

BS

1003.3mm

OR-G-ZE7-A

BS

OR-G-7F8-A

When graphics are notched, a 7/8" square is cut in the appropriate location.

FS: Graphics mounted to front of truss system

BS: Graphics mounted to back of truss system

Dye Sublimation graphics are attached to truss with velcro. UV panels are attached to truss with magnet.

To ensure quality, please note:

Each graphic has a specific code or number located on the graphic. The electronic print files provided must be named accordingly. Using this coding system will allow us to preflight and prepare your files for print more efficiently. If you fail to provide your graphic files in this format, additional charges may be necessary to complete your printed materials.

